


L430F - 4" Blade Flanged Frame

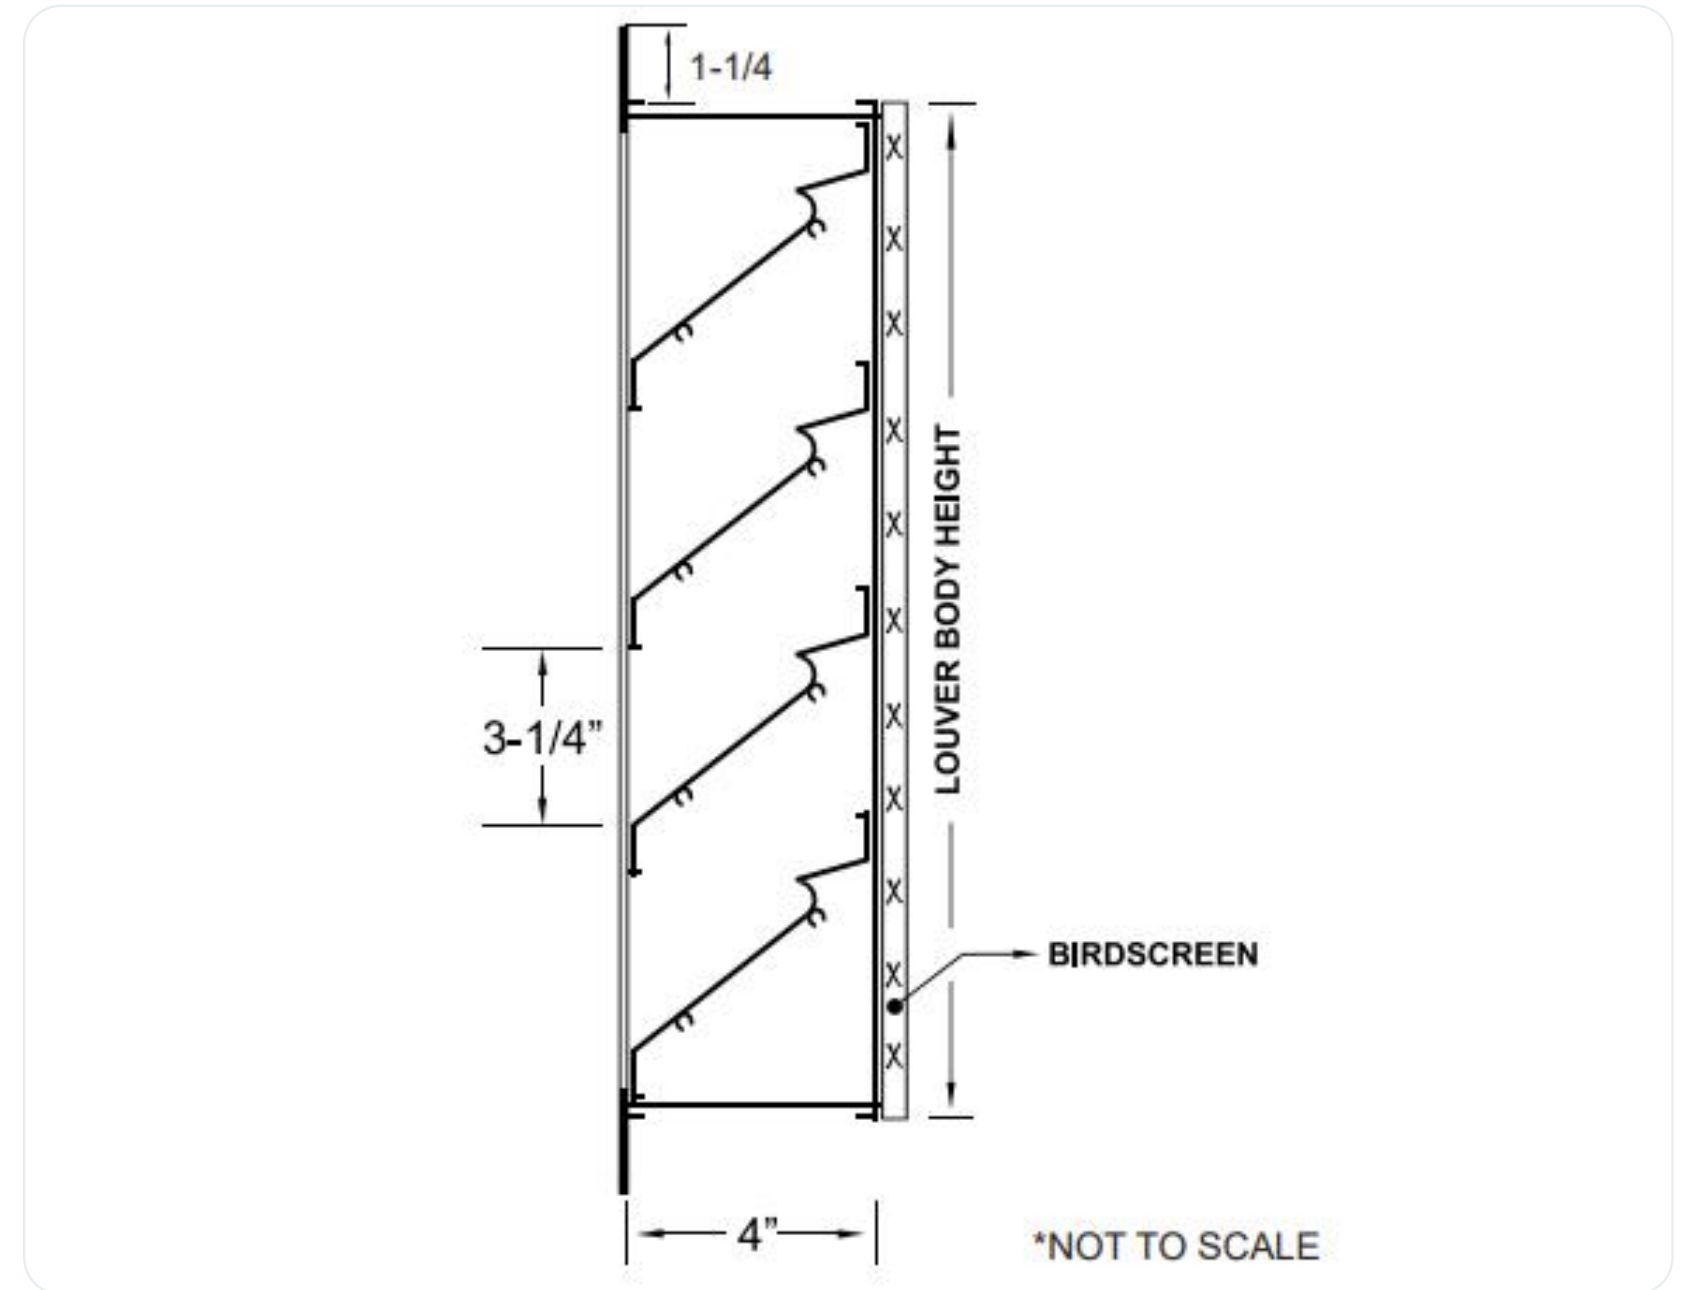

Standard Features

- ✓ Depth:
4 Inches
- ✓ Frame Thickness:
0.075" 6063-T5 Extruded Aluminium.
- ✓ Blade Thickness:
0.075" 6063-T5 Extruded Aluminium.
- ✓ Blade Centres:
3-1/2" (+/- 1/4")
- ✓ Blade Angle:
35°
- ✓ Minimum Panel Size:
12" x 8"
- ✓ Maximum Panel Size:
96" x 144"
- ✓ Standard Finish:
Mill Aluminum Stand.
- ✓ Free Area :
48"x48" Unit: 7.97 sq. ft. free area
- ✓ Free Area Percentage:
48.0 Percent
- ✓ Point of Water Penetration At:
beginning point - 730 FPM @ .01oz/sq ft
- ✓ Static pressure :
@ 980 FPM / 0.15 W.G.

Optional Features

- ✓ Bird Screens:
3/4" x 0.52" Flattened Expanded Alum. (STD) | 1/4" x 1/4" inter crimped | Aluminum. | 1/2" x 1/2" inter crimped Aluminum.
- ✓ Insect Screen:
18" x 16" mesh, .011" diameter Alum. Wire
- ✓ Flange Options:
1-1/2", 2" & 3" (FL.)
- ✓ Finish:
Clear Anodized, Integral, Anodized, Baked Powder Coat. RAL # _____
- ✓ Accessories:
Filter Track, Security Bars, Stainless Steel Screws, Aluminum Blank Off Panel, Custom Geometric Shapes, 1" or 2" Insulated Blank-off Panel, Extended Sill.

